

.050" Mini D Ribbon (MDR) Cable Assembly

High Performance Digital Transmission System — 20 to 26 Position

14520-EZDB-XXX-0EX



- MDR shielded, High Speed Digital Data Transmission System
- 26 position MDR-LCD digital video interface for PanelLink™/TMD5™ transmission
- Individually shielded 100 Ω twinax for data rates greater than 1 Gbps
- Features small and flexible shielded round cable with excellent EMI protection
- Ribbon type contact — industry preferred
- Reliable repetitive plugging/unplugging
- Quick release latches

Date Issued: June 23, 1999

TS-0883-04
Sheet 1 of 3

236

Physical

Connector Contact Plating

Wiping Area: See ordering information

Shell

Color: Parchment/Beige

Material: Acrylonitrile Butadiene Styrene (ABS)

Cable

Color: Parchment/Beige

Jacket Material: Polyvinyl Chloride (PVC)

Flammability: AWM VW-1

Electrical

Voltage Rating: 30 V

Current Rating: 1 A

Insulation Resistance: $> 5 \times 10^8 \Omega$ at 500 Vdc

Withstanding Voltage: 500 Vrms for 1 minute

Individually Shielded Twisted Pairs

Characteristic Impedance: $100 \pm 10 \Omega$

Conductor Size: 28 AWG Stranded

Propagation Velocity: 1.25 ns/ft [4.1 ns/m]

Environmental

Temperature Rating: -20°C to $+75^\circ\text{C}$

UL File No.: E86982

3M Electronic Products Division



6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373


.050" Mini D Ribbon (MDR) Cable Assembly

High Performance Digital Transmission System — 20 to 26 Position

14520-EZDB-XXX-0EX

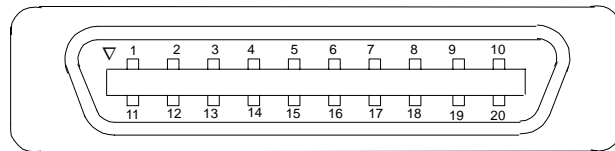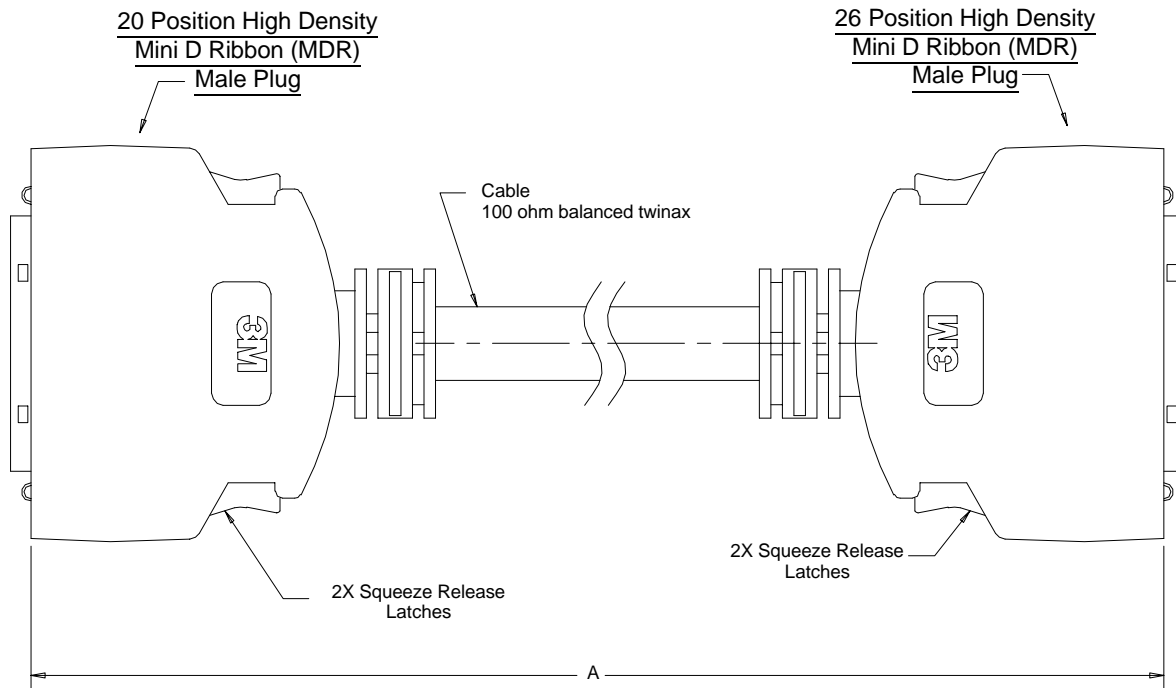

MDR 20 Position Plug

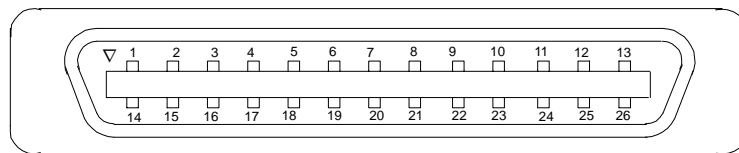

MDR 26 Position Plug



Ordering Information

14520-EZDB-XXX-0EX

Length see Dim A
100 = 1 meters
200 = 2 meters
300 = 3 meters
500 = 5 meters
A00 = 10 meters

Plating Options for Wiping Area:
Blank = $8 \mu''$ [$0.2 \mu\text{m}$] Min. Gold
C = $30 \mu''$ [$0.76 \mu\text{m}$] Min. Gold

TS-0883-04
Sheet 2 of 3

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

.050" Mini D Ribbon (MDR) Cable Assembly

High Performance Digital Transmission System — 20 to 26 Position

14520-EZDB-XXX-0EX

MDR-DFP 20 to 26 Position, Pinout P26-20 (Rev. 1.1)

DFP Transmitter, Tx (Host)

Pin Number	Signal
1	Tx 1+
2	Tx 1-
3	Tx 1 shld
4	Tx Clk shld
5	Tx Clk +
6	Tlk Clk -
7	DDC gnd
8	DDC +5 Vdc
9	NC
10	NC
11	Tx 2+
12	Tx 2-
13	Tx 2 shld
14	Tx 0 shld
15	Tx 0+
16	Tx 0-
17	NC
18	sense
19	DDC/SDA
20	DDC/SCL

P26-7 Receiver, Rx (Monitor)

Pin Number	Signal
1	DDC gnd
2	Rx Clk shld
3	DDC +5 Vdc
4	Rx 0-
5	Rx 0+
6	NC
7	NC
8	NC
9	DDC/SDA
10	Rx 1 shld
11	NC
12	Rx 2-
13	Rx 2+
14	Rx Clk-
15	Rx Clk+
16	NC
17	Rx 0 shld
18	DDC/SCL
19	NC
20	NC
21	NC
22	Rx 1-
23	Rx 1+
24	sense
25	Rx 2 shld
26	NC

TS-0883-04
Sheet 3 of 3

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>