

INFINITY 1




INFINITY SERIES MODEL # AI1INF6666

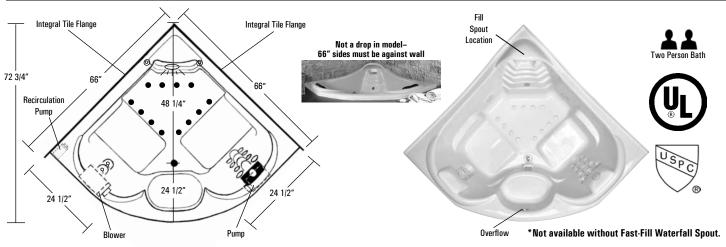

No alternate pump location available.

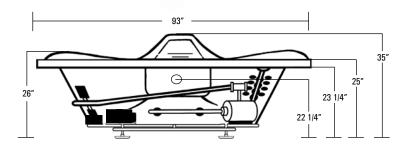

Rough-In Plumbing Measurements



SPECIFICATIONS:

GENERAL SPECIFICATIONS:

Tub Size 66" x 66" x 35" 168 cm x 168 cm x 89 cm Bathing Well Lounge 1: 40" long

Lounge 1: 21" wide Lounge 2: 45" long Lounge 2: 21" wide 23" interior depth

Shipping Weight
Tub Weight Filled
Tub Weight W/Equipment
Gallons to Overflow
Tub Weight W/Equipment
Shipping Weight W/Equipment
Weight W/Equipment
Weight W/Equipment
William William

Gallons to Operate 1 bather: 96 gal. / 363 L 2 bathers: 81 gal. / 306 L

ELECTRICAL SPECIFICATIONS:

Pump 2 HP; 12 AMP; 110V Inline Heater 1.5 kW; 12.5 AMP; 110V

Requirement 1-15 AMP 2 pole, separate circuit

required protected with Class A GFCI

Blower 1 HP; 10.5 AMP; 110V

Requirement 1-15 AMP 1 pole, separate circuit

required protected with Class A GFCI

This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.

This unit is not recommended for shower installations.

This unit has a 3/4" female waterfall fill spout connection.

Fax-On-Demand Document # 1118

12



STANDARD EQUIPMENT:

16 Hydrotherapy Jets including:

- 12 Shiatsu Back Jets
- 2 Recessed Rotary Massage Jets
- 2 Full Size Pressure-Flo Hydrotherapy Jets

Air Bath System:

- 1 HP Variable Speed Air Blower with 20-Minute Timer
- Electronic Control Panel
- Automatic Purge and Dry Cycle
- 600 Watt Air Heating System

Aquatic Quality Features:

- 2 HP Run-Dry Pump
- 1.5 kW Inline Maintenance Heater
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Pump Operation
- Shiatsu Electronic Control Panel with Preprogrammed Jet Sequencer
- Bath-Side Electronic Control Panel with Temperature Display
- Integral Tile Flange
- Pulsating Neck Jet Pillow and Sculptured Foam Pillow
- 2 Reclining Lounge Seats and 2 Arm Rests
- Continuous Waterfall with Recirculation Pump
- Integrally Molded Fast-Fill Waterfall Spout (valves not included)
- Chromatherapy
- Slip Resistant Floor
- Adjusta-Level Base
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite® Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

UL & IAPMO Listed, Factory Tested

Limited Lifetime Warranty

OPTIONAL EQUIPMENT:

- Jet Finish
 - Chrome, Polished Brass, Gold, Polished Nickel or Satin Nickel
- · Lift & Turn Waste and Overflow
- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Hand Held Jet Chrome or Polished Brass
- · Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work.

800.555.5324

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com