


# Through Hole Power Inductors


## THAH1485 & 1411 Type

### Features


- RoHS compliant.
- High current ( Isat up to 40A ) through hole type.
- Magnetically shielded, suitable for high density mounting.
- High energy storage and low DCR.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor application.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



### Mechanical Dimension:

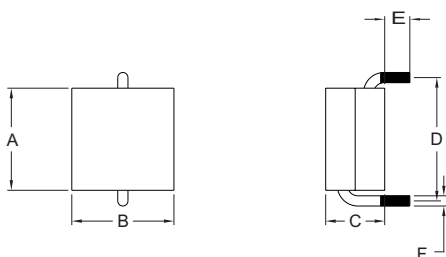

### RECOMMENDED PAD PATTERNS



UNIT:mm/inch  
 A = 13.50 / 0.531 Max.  
 B = 13.50 / 0.531 Max.  
 D = 16.00±0.5 / 0.630±0.020  
 E = 3.50±0.5 / 0.138±0.020  
 F = 1.70 / 0.067

### Electrical Characteristics: At 25°C: 100KHz, 1.0V

PART NO.	Lo <sup>1</sup> (uH)	Li (uH) MIN	DCR (mΩ) MAX	I sat <sup>2</sup> (A dc)	Dimension "C" (mm / inch) MAX
THAH1485-0R4	0.40	0.320	0.9	40	8.5 / 0.335
THAH1485-0R5	0.50	0.375	0.9	40	8.5 / 0.335
THAH1411-0R7	0.70	0.547	1.1	40	10.5 / 0.413
THAH1411-0R8	0.80	0.576	1.1	40	10.5 / 0.413

1. Lo is the initial inductance and the tolerance is ± 20%.
2. Isat is the DC current which cause the inductance drop not lower than Li.
3. Operating temperature : -40°C to 125°C ( including self-temperature rise ).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>