



EVERFOCUS

1/3" Wide-Dynamic

True D/N Rugged Dome Color Camera

Operation Instructions

Model No. **EHD650**

Please read this manual first for correct installation and operation. This manual should be retained for future reference. The information in this manual was current when published. The manufacturer reserves the right to revise and improve its products. All specifications are therefore subject to change without notice.

PRECAUTIONS

1. Do not install the camera near electric or magnetic fields.

Install the camera away from TV, radio transmitter, magnet, electric motor, transformer, audio speakers since the magnetic fields generate from above devices will distort the video image.

2. Never disassemble the camera nor put impurities in it.

Disassembly or impurities may result in trouble or fire.

3. Never face the camera toward the sun.

Direct sunlight or severe ray may cause fatal damage to sensor and internal circuit.

4. Keep the power cord away from wet and never touch the power cord with wet hands.

Touching the wet power cord with hands or touching the power cord with wet hands may result in electric shock.

5. Never install the camera in areas exposed to water, oil or gas.

Water, oil or gas may result in failure, electric shock or fire.

6. Cleaning

Do not touch the surface of sensor by hand directly. Use a soft cloth to remove the dirt from the camera body. Use lens tissue or a cotton tipped applicator and ethanol to clean the sensor and the camera lens.

7. Do not operate the camera beyond the specified temperature, humidity or power source ratings.

Use the camera at temperatures within $-40^{\circ}\text{C} \sim 50^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim 122^{\circ}\text{F}$) and humidity between 20%~80%. The input power source is 24VAC .

TABLE OF CONTENTS

<u>1. PRODUCT OVERVIEW.....</u>	<u>3</u>
1.1 MAIN FEATURES	3
1.2 PACKAGE CONTENTS.....	4
1.3 SPECIFICATIONS	5
1.4 DIMENSIONS.....	6
1.5 HARDWARE OVERVIEW.....	7
<u>2. INSTALLATION.....</u>	<u>8</u>
2.1 INSTRUCTION FOR ROTATING THE CAMERA MOUNTING.....	9
2.2 MOUNTING CAMERAS ON THE CEILING/WALL	10
2.3 CONDUIT CABLE AND CONNECT POWER AND VIDEO	11
2.4 ADJUST LENS ZOOM AND FOCUS AND VIEW	14
<u>3. HOW TO CONTROL OSD MENU.....</u>	<u>15</u>
3.1 WHERE IS OSD CONTROLLER.....	15
3.2 GENERAL OPERATION INSTRUCTION	15
<u>4. MAIN MENU</u>	<u>17</u>
4.1 SETUP ID	17
4.2 LENS	18
4.3 WDR (WIDE DYNAMIC RANGE).....	19
4.4 WB CONTROL.....	19
4.5 AGC	20
4.6 LOW LIGHT	21
4.7 SYNC	22
4.8 DAY/NIGHT	23
4.9 EXIT MENU	23

1. PRODUCT OVERVIEW

The most technically advanced EHD650 is the newest vandal-resistant Color Rugged Dome Camera from EverFocus Electronics. The Color Rugged Dome Camera can withstand a blow from a 10-pound sledgehammer and has a built-in heater that allows for operation in low temperatures. It is perfect for all high-profile crime-prone applications such as building, entrances, retail stores, and shopping malls. The EHD650 is unquestionably one of the world's toughest cameras and is your best choice for vandal resistance.

1.1 Main Features

- 1/3" Color Digital Pixel System (DPS) sensor
Each pixel is processed independently to get clear and usable images
- High resolution: Over 480 horizontal TVL
- Superior Wide Dynamic Image Quality
Film-like colors are described under various light conditions even in high dynamic range scenes. Dynamic Range is greater than 120dB.(max)
- True Day Night function:
True day/night by moving OLPF and glass. Converts to B/W mode when light is low
- OSD function control
- Vandal proof
- Vari-focal lens for auto iris control
- Line Lock mode
- Polycarbonate shell withstand the impact of 10 pounds sledgehammer, smoke color or clear as option
- Aluminum die-casting base, smoke color or clear as option
- Unique security screw locked
- Operating temperature -40°C ~ 50°C (-40°F~122°F)
- Heater triggered when temperature less than 10°C (50°F)

1.2 Package Contents

- Camera Unit x 1
- Mounting Accessory includes:
 - Screws x 4
 - Expanding Screws x 4
 - Wrench x 1

- Weather-proof Conduit x 1



- Extension Power Cable and Video cable x 1



- Extension Power Cable x 1



- Desiccant Pack x 1



- Manual x 1

OPTIONAL ACCESSORIES

- Wall Mount Bracket (BA-EHD)
- EN220 5.6-inch LCD Test Monitor




1.3 Specifications


Pickup Device	1/3" DPS Wide Dynamic range sensor
Video Format	NTSC or PAL
Scanning System	NTSC: 525 TV lines, 60 fields/sec PAL: 625 TV lines, 50 fields/sec.
Picture Elements	720(H) X 540(V)
Horizontal Resolution	480TVL
Sensitivity	0.08Lux/F=1.2 (DSS x 32)
S/N Ratio	Over 48dB
Electronic Shutter	1/50(1/60)~1/100,000
Lens Type	Vari-focal lens, Auto Iris f=2.9~10mm f=9~22mm *Lens models and availability vary in different regions
OSD Menu	Yes
Back Light Comp.	Yes
Auto Gain Control	Yes
Auto White Balance	Yes
Flickerless	Yes
Slow Shutter	Up to 32x (2, 4, 8, 16, 32)
Dynamic Range	95dB typical, 120dB max
Gamma Correction	0.45
Video Output	BNC 1.0Vp-p , 75ohm
Sync. Mode	Line Lock/Internal Sync
Weatherproof	IP66
Vandal Resistant	Yes
Heater	Yes, built-in
Power Source	24VAC
Power Consumption	24VAC: 6VA max. (heater OFF) 24VAC: 20.5W max. (heater ON)
Dimensions	130mm(W) x 98.9mm(H) x 130mm(D); 5.1"(W) x 3.9"(H) x 5.1"(D)
Weight	1 kg ; 2.2 lbs
Operating Temperature	-40°C~50°C ; -40°F~122°F (20%~80% Humidity)
Certifications	FCC/CE

1.4 Dimensions


a.

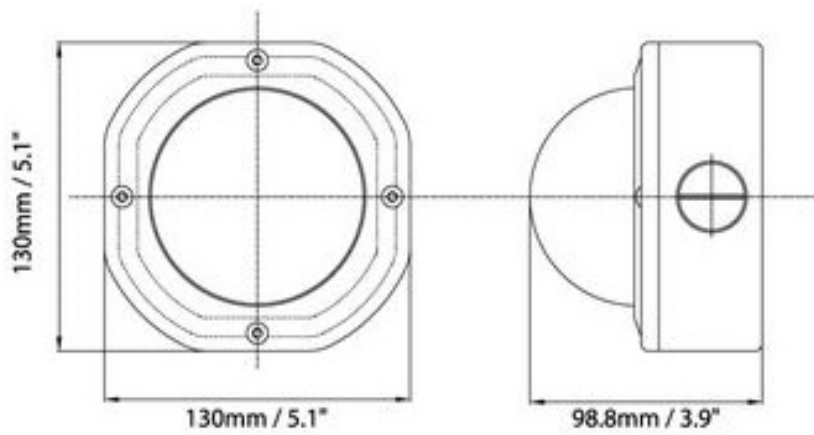

b.

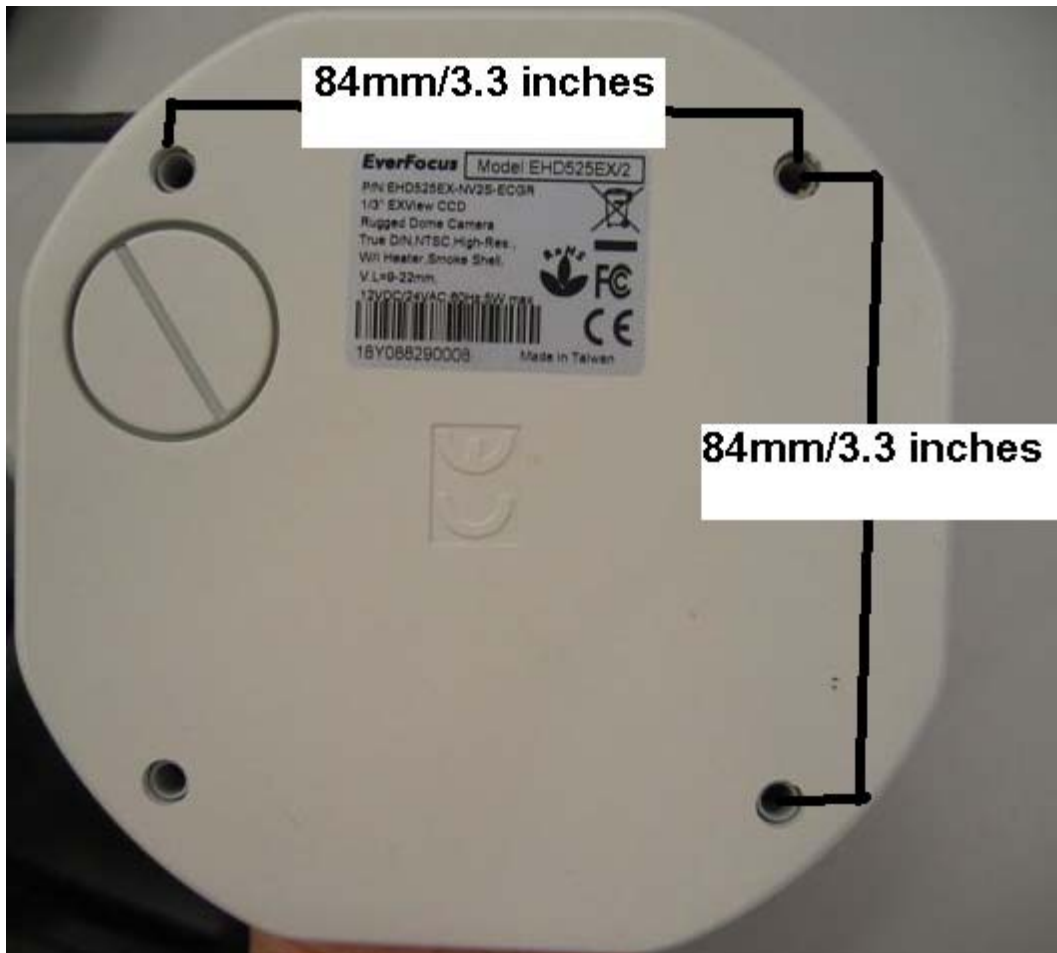

1.5 Hardware Overview

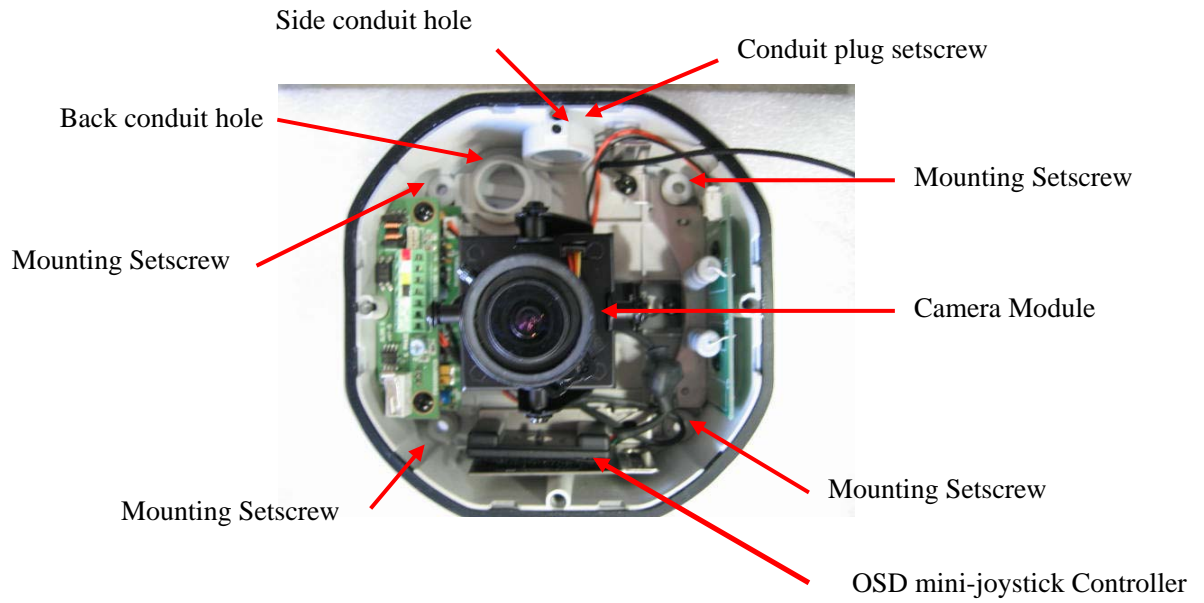

2. INSTALLATION

This section covers simple steps and detail installation. Please follow instruction for preventing any unnecessary damage.

Simple Steps:

1. Open camera cover.
2. Rotate camera if install on ceiling
3. Drill holes on wall/ceiling. Mount cameras.
4. Connect power and video.
5. Optional connect to EN220 Test Monitor for field testing (monitor is not included).
6. Adjust lens and camera position.
7. Adjust camera setting by using the OSD controller.
8. Put in DESICCANT PACK and close the camera cover for avoiding moisture in the camera.

Detail Installation Steps:

1. Loosen the 4 fix screws on the housing cover by using the attached wrench (Figure 1). Please pay attention not to damage the lens.

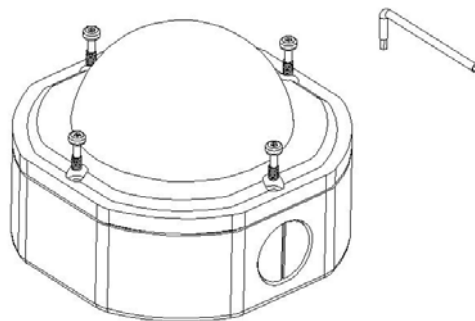


Figure 1

2. Remove the camera

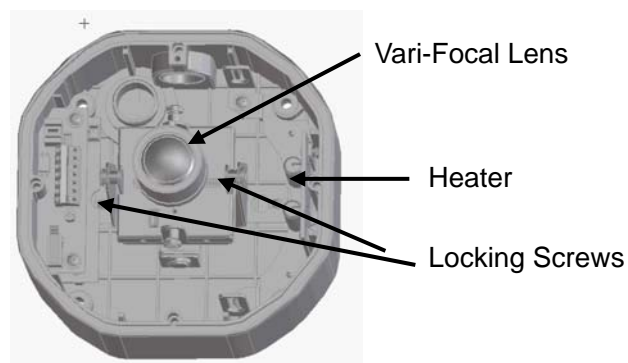


Figure 2

To remove the camera, first unplug the wire connection on the back of the camera. Then loosen the 2 locking screws on the camera base, push the camera base to the right (toward heater direction, as shown in Figure 2), remove the camera from the mounting base. Reinstall the camera and the cable while the base mounting is completed.

2.1 Instruction for rotating the camera mounting

- a. Please unscrew fixing screws that hold the camera module.

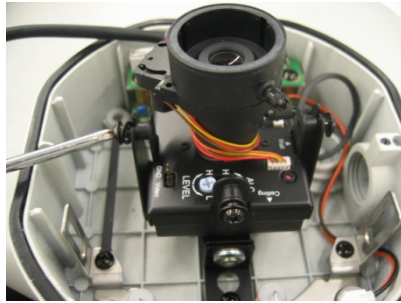



Figure 3-1

- b. Remove the camera



Figure 3-2

- c. Aim “Ceiling” Mark to “▲” mark on camera lead frame. See figure 3-3.

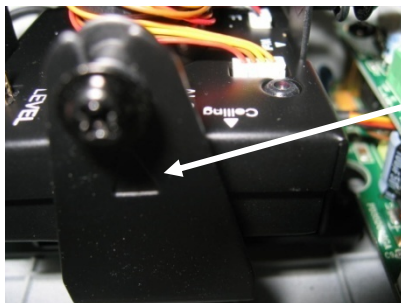

“▲” mark.

Figure 3-3

- d. Tighten fixing screws and finished




Figure 3-4

2.2 Mounting Cameras on the Ceiling/Wall

- a. Mount the base to the wall or ceiling, fix the base by the 4 screws in the accessory pack.(see dimension b for drilling dimension). This dome is weighted 1.7kg, please make sure if the mounting is strengthened enough to support it, if not, please reinforce the mounting according to the environment. See figure 4.


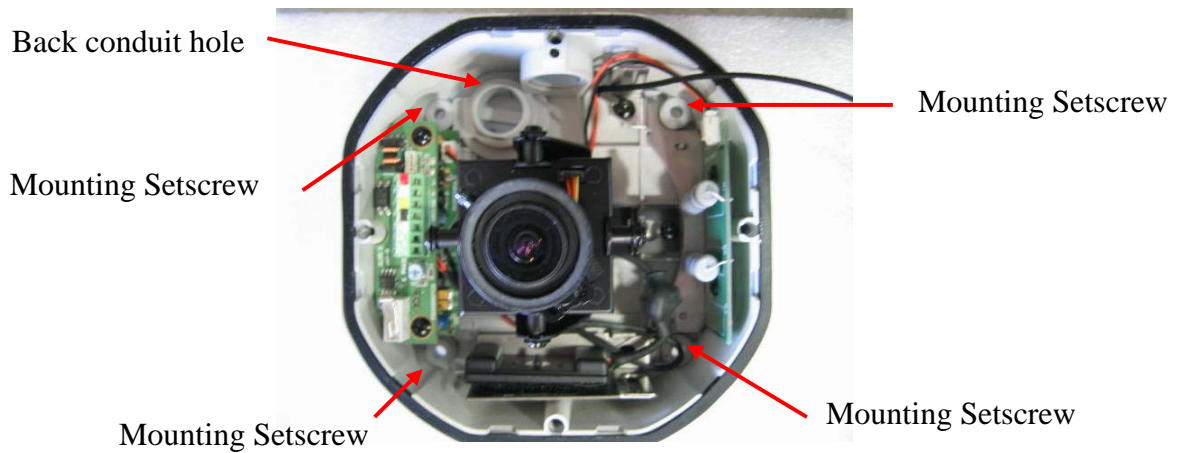


Figure 4

b. Take off cable conduit if you need to wire cable through side conduit hole. The camera comes with a conduit plug pre-installed in the PF 1/2 conduit hole on the side. The conduit plug can be removed and installed in the back conduit hole (as shown in Figure 5)

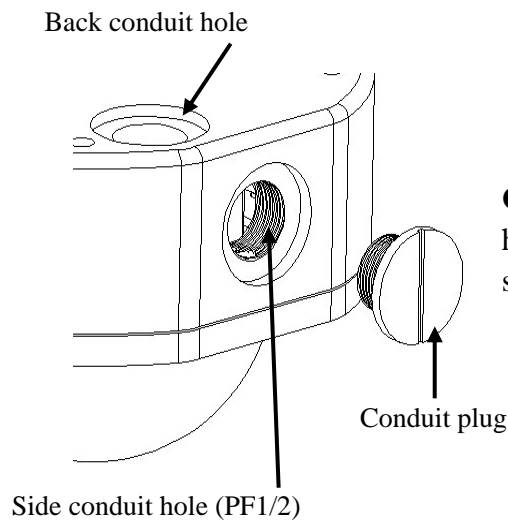

Caution: When used in the environment with high humidity, apply an appropriate gasket or sealant around the conduit connection.

Figure 5

2.3 Conduit cable and Connect Power and Video

- a. If you want to wire cable through side conduit hole. Find the water-proof conduit in the bag and wire power connection cable through it.



Figure 6-1



Figure 6-2

- b. Connect cable conduit to the conduit hole and make it tight.

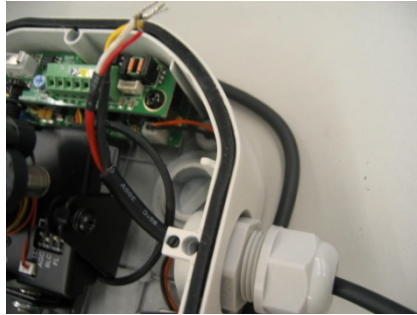



Figure 6-3

- c. Connect the power supply cable (24VAC), video output to the proper connectors. The extension power has 4 colors for Power +(red), - (white) and Video(yellow), GND(black). ***Please match the colors with terminal board shown as Figure 7. Yellow to yellow, Black to Black, White to white, red to red.*** Wrong connection will damage the camera!!



Figure 7

- d. Connect 24VAC regulated power source to the camera. Please use power extension for connecting to it if the power adapter cable is not long enough.

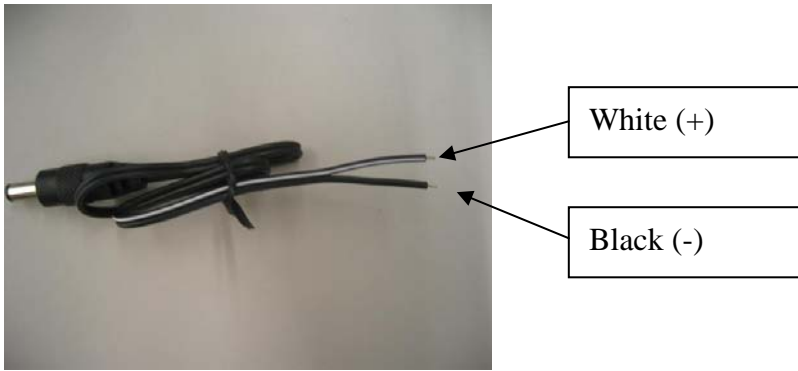

e. Optional connect to Alarm(Please see figure 8 for terminal functions)

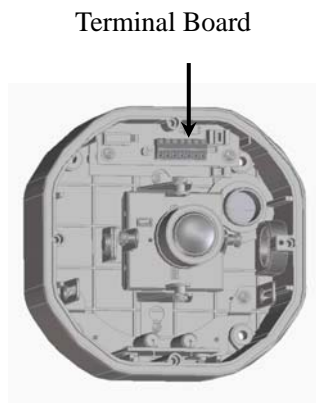


Figure 8

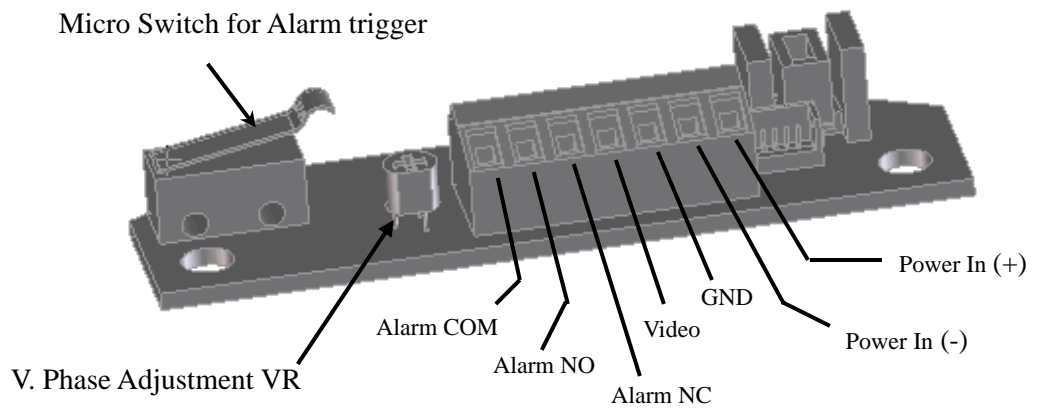


Figure 9

f. V. Phase adjustment screw is located on the termination board. The vertical phase may require adjustment to synchronize the vertical phase of the camera with other camera in the system when it is to be used in the line-lock sync mode. Make the adjustment when the vertical phase of the camera does not match with other cameras.

2.4 Adjust Lens zoom and focus and View

- a. Adjust Lens zoom and focus(for vari-focal lens models)

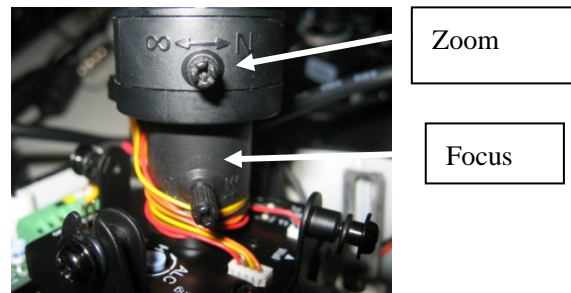


Figure 10

- b. Adjust view angle

The camera can be rotated 360° horizontally, 140° vertically and 60° 3rd axis view angles (as shown in Figure 11). Adjust the proper camera view angle as needed.

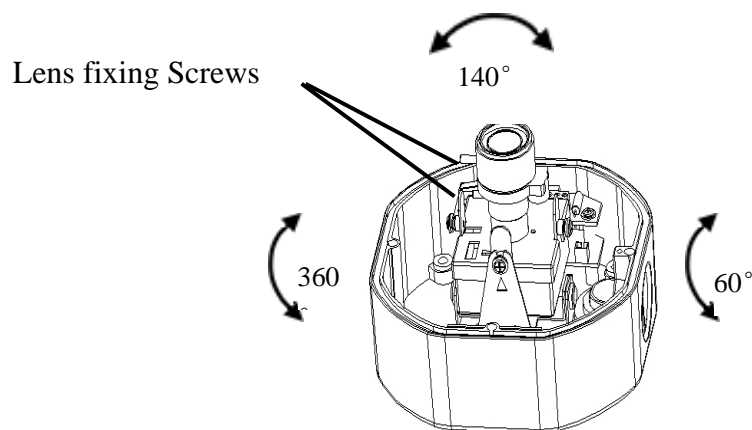


Figure 11

3. HOW TO CONTROL OSD MENU


3.1 Where is OSD Controller

Detach the mini-joystick on the side of camera housing. See the following picture.



OSD mini-joystick controller is attached here.

3.2 General Operation Instruction

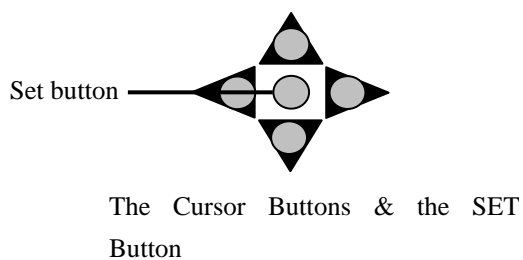

MAIN MENU	
SETUP ID..	
LENS	DC..
WDR..	
WB CONTROL	ATW
AGC	ON
LOW LIGHT	SLOW-SH..
SYNC ..	
DAY/NIGHT	
EXIT MENU	

I. Press the SET button for 3 seconds


The menu screen will appear on the monitor as the block shown above.

II. Using the cursor button

Use the cursor button ▲ or ▼ to move the cursor up or down. Use the cursor button ◀ or ▶ to adjust the mode or parameter of settings.

III. Switch to sub-menu screens

When the item with sub-menu is selected, press the SET button to switch to the sub-menu for further settings. Please refer to the figure below.

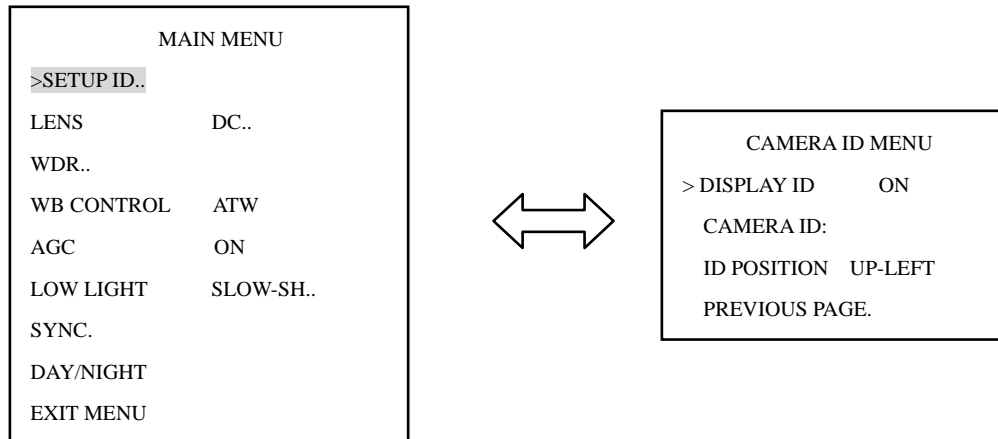

NOTE:

For those selected items with “..” sign in the end, they have the sub-menu for further settings.

IV. Return to previous page

Press the SET button to return to previous page.


V. Close the menu screen

To close the menu screen, use the cursor button to select **EXIT** and press the SET button.

4. MAIN MENU

4.1 Setup ID

Camera Menu: Display ID/Camera ID/ID position

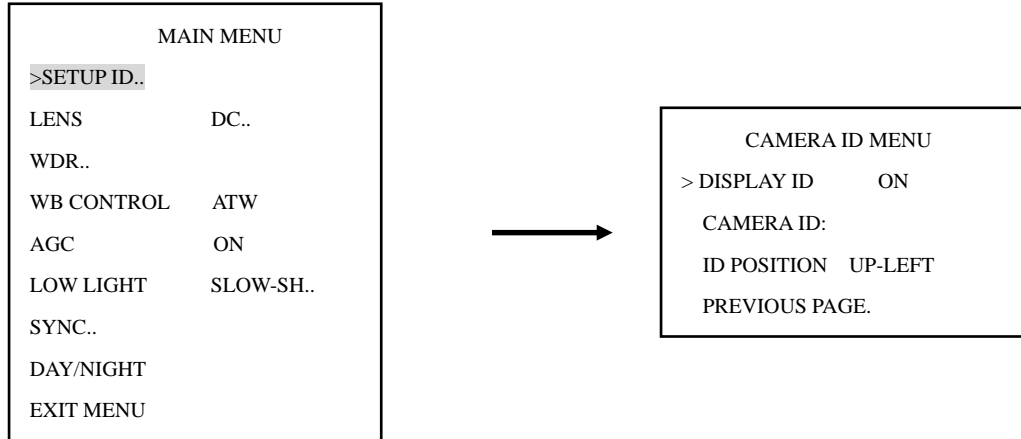

DISPLAY ID: ON/OFF.

The camera ID can be displayed on the screen by setting “ON”.

CAMERA ID: When “ON” is selected, user can set the Camera ID up to 12 characters. Please refer to the table below for detailed character patterns. Use the cursor button ◀ or ▶ to locate characters (characters will display in the same order as shown in table), press the **SET** button to choose the character. Use the cursor button ▶ to move to the next character for setting.

Once the characters of camera ID are all selected, press the **SET** button for 1 sec to close the menu and the Camera ID will show on the screen as the figure below.

Ex: CAMERA ID: EverFocus
101



!	"	#	\$	%	&	'	()	*	+	,	-	.	/	0	1	2	3	4
5	6	7	8	9	:	;	<	=	>	?	@	A	B	C	D	E	F	G	H
I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	[\
]	^	_	`	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p
q	r	s	t	u	v	w	x	y	z	{		}	~		ı	ı	ı	ı	ı
ı	§	¨	©	ª	«	¬	-	®	¯	°	±	²	³	´	µ	¶	·	,	¹
º	»	¼	½	¾	¿	À	Á	Â	Ã	Ä	Å	Æ	Ç	È	É	Ê	Ë	Ì	Í
Î	Ï	Ð	Ñ	Ò	Ó	Ô	Õ	Ö	×	Ø	Ù	Ú	Û	Ü	Ý	Þ	ß	à	á
â	ã	ä	å	æ	ç	è	é	ê	ë	ì	í	î	ï	ð	ñ	ò	ó	ô	õ
ö	÷	ø	ù	ú	û	ü	ý	þ	ÿ										

ID POSITION: UP-LEFT / UP-CENTER / UP-RIGHT / DWN-LEFT / DWN-CENTER / DWN-RIGHT

There are four positions can be chosen to show the CAMERA ID on the screen. Choose an ID position that will not cover the import/critical part of images.


PREVIOUS PAGE: Press SET button and you can return to the previous page.

4.2 Lens


LENS-DC:

DC LEVEL: The brightness of the screen can be adjusted on DC mode in DC LEVEL. The level can be adjusted MIN -42 to 20 MAX.

PREVIOUS PAGE: Press SET button and you can return to the previous page.

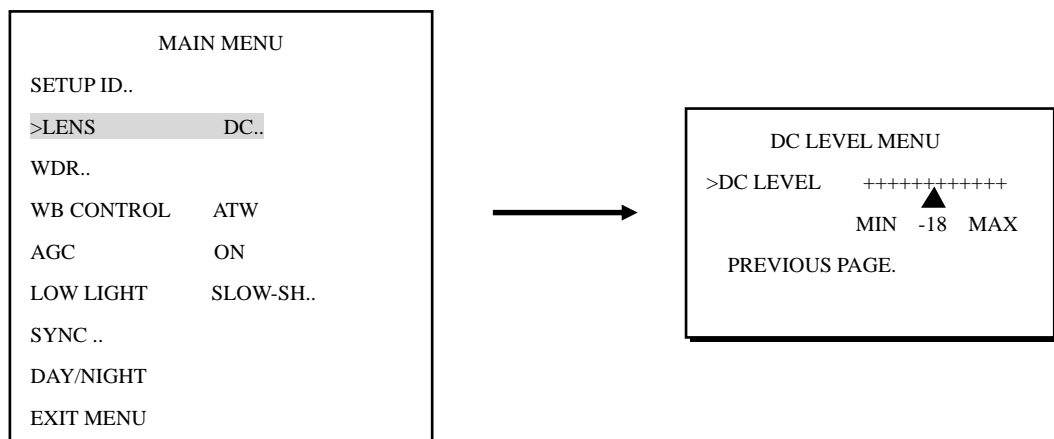

4.3 WDR (Wide Dynamic Range)

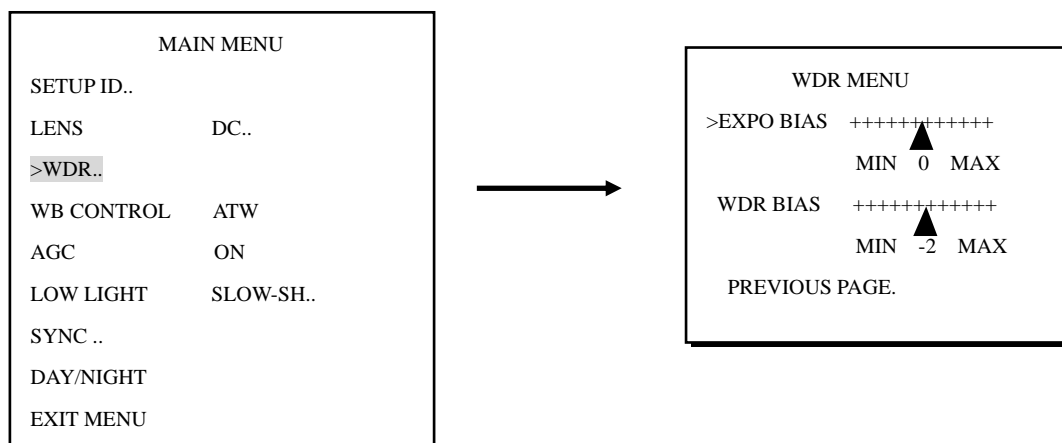

EXPO BIAS: MIN -18 ~ 18 MAX

Select exposure bias from min. -18 to max. 18.

WDR BIAS: MIN -20 ~ 20 MAX

The camera offers outstanding Wide-Dynamic Range (WDR). User can manually set the Dynamic Range by moving the tag along -20 to 20 level bar. When contrast of lighting condition is larger, increase the number, or decrease the number towards “0” if the contrast of lighting condition is smaller.

PREVIOUS PAGE: Press SET button and you can return to the previous page.


4.4 WB Control

ATW/AWB/MANUAL

WB CONTROL: AWB (Auto White Balance).

PUSH AWB CONFIRM: This saves the current Auto White Balance setting. If lighting environment ever changes, you can change this AWB again.


CANCEL: Quit this menu without saving AWB.

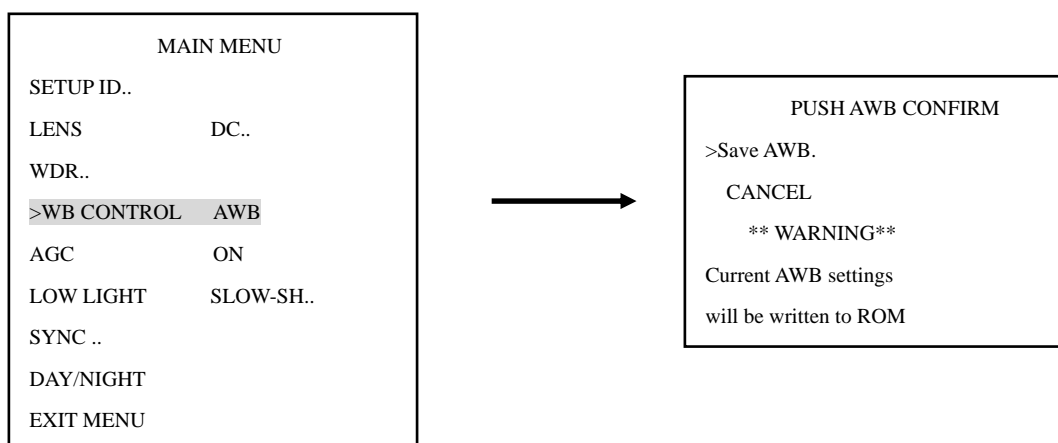

WB CONTROL: ATW

ATW (Auto Tracking White Balance): This mode can be used within the color temperature range from 2,500°K to 9,500°K (eg, fluorescent light, outdoor, sodium vapor lamp or inside tunnels).

WB CONTROL: MANUAL

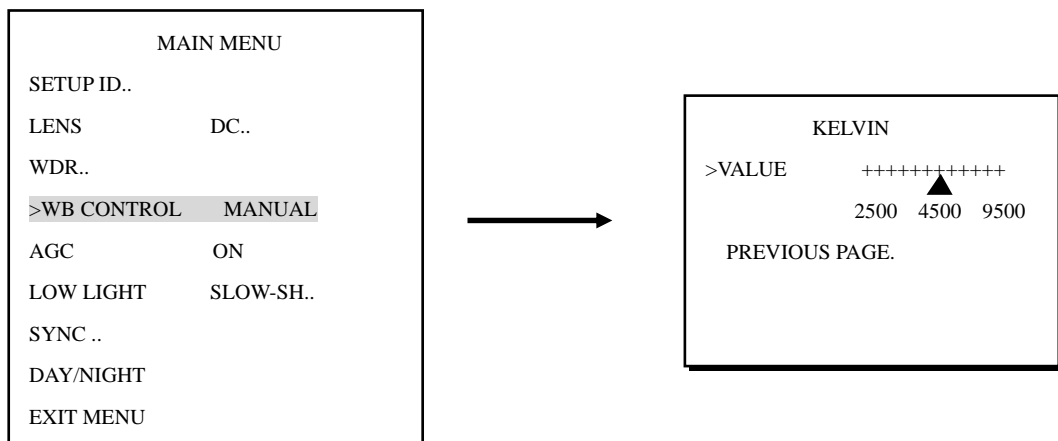


KELVIN: value ranges from 2500 to 9500. You could adjust White Balance manually according to environment's color temperature.

PREVIOUS PAGE: Press SET button and you can return to the previous page.

4.5 AGC

ON/OFF



AGC: ON. By selecting ON, you can activate automatic gain control feature.

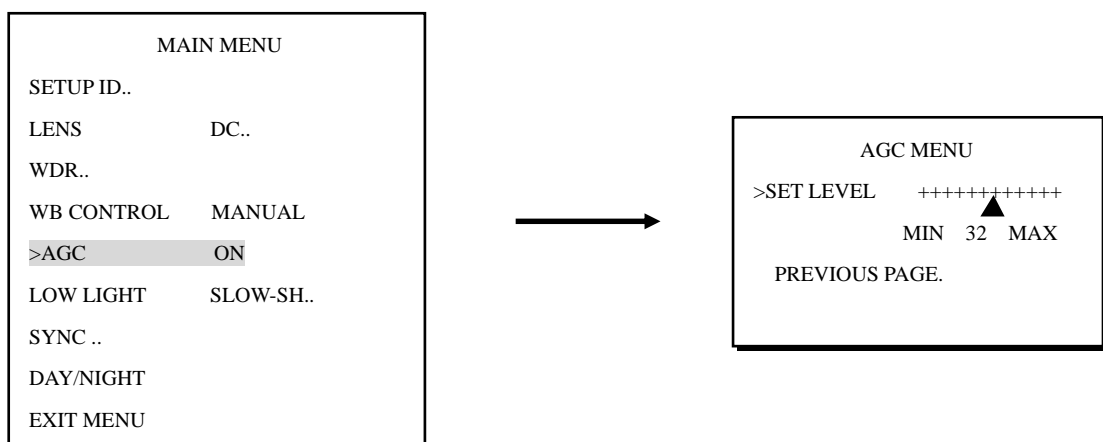

AGC MENU: SET LEVEL from MIN 0 to MAX 36.

PREVIOUS PAGE: Press SET button and you can return to the previous page.

AGC:OFF. It is a fixed gain adjustment.

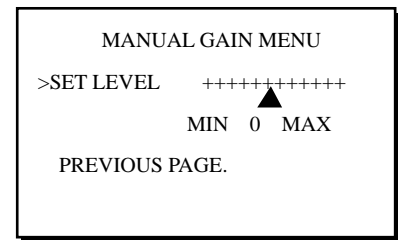
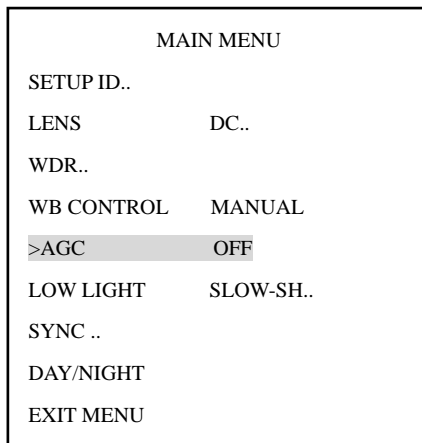


AGC MENU: SET LEVEL from MIN -34 to MAX 43. The more the level of gain increases, the brighter the screen and the level of noise increases as well.

PREVIOUS PAGE: Press SET button and you can return to the previous page.

4.6 Low Light

SLOW SH../B&W SS/GAIN

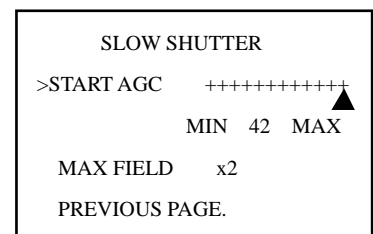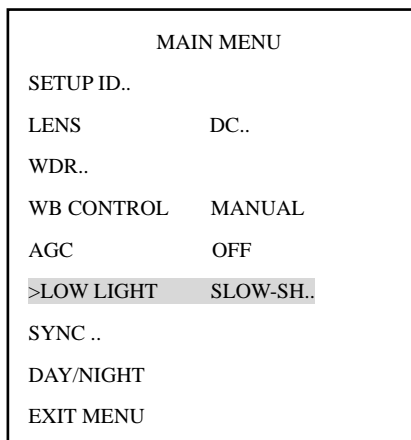

LOW LIGHT: SLOW SH..



SLOW SHUTTER: Select MAX FIELD: X2/X4/X8/X16/X32

PREVIOUS PAGE: Press SET button and you can return to the previous page.

LOW LIGHT: B&W SS. Black and White Slow Shutter is fixed, not adjustable. Shutter speed is fixed at X32.

LOW LIGHT: GAIN. Images remain in color condition. This option is not adjustable.

4.7 SYNC

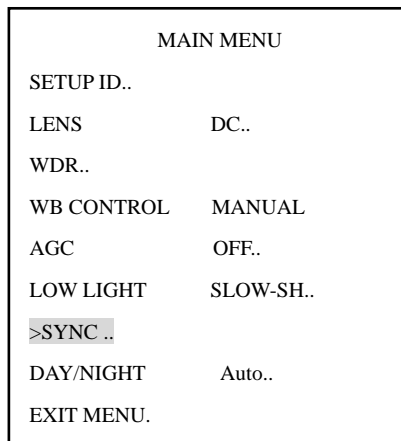



SYNC: INTERNAL/LINELOCK

SYNC-INTERNAL

Internal synchronization.

SYNC – LINELOCK

Phase adjustment may be necessary in multiple camera installations to prevent picture roll.

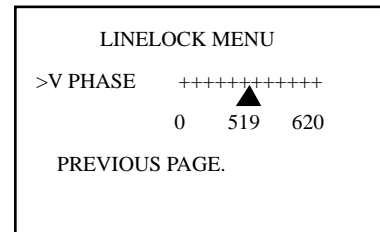

V.PHASE: 0~620

4.8 Day/Night

Auto/COLOR/B/W

```

MAIN MENU
SETUP ID..
LENS          DC..
WDR..
WB CONTROL    MANUAL
AGC           OFF
LOW LIGHT     SLOW-SH..
SYNC ..
>DAY/NIGHT    Auto..
EXIT MENU..
  
```



```

DAY/NIGHT LEVEL SETUP
>C->B  31  20 ++++++35
B->C   5   0 ++++++10
PREVIOUS PAGE.
  
```

DAY/NIGHT: Auto. For automatic switch between day and night mode.

C->B 20~35

B->C 0~10

PREVIOUS PAGE: Press SET button and you can return to the previous page.

DAY/NIGHT: Color. To keep color image at all time.

DAY/NIGHT: B/W. To keep Black and White image at all time.

4.9 Exit Menu

```

MAIN MENU
SETUP ID..
LENS          DC..
WDR..
WB CONTROL    MANUAL
AGC           OFF
LOW LIGHT     SLOW-SH..
SYNC ..
DAY/NIGHT     Auto..
>EXIT MENU..
  
```




```

SAVE RESTORE EXIT
>EXIT NO CHANGE.
SAVE NEW AND EXIT.
RESTORE FACTORY SETTINGS.
SW REV:  3.4
FW REV:  2.5-4.0.42
PREVIOUS PAGE.
  
```

EXIT NO CHANGE: press enter and you can exit this page without saving the change you have made.

SAVE NEW AND EXIT: press enter to exit and the changes you have made will be saved.

SAVE RESTORE EXIT: RESTORE FACTORY SETTING

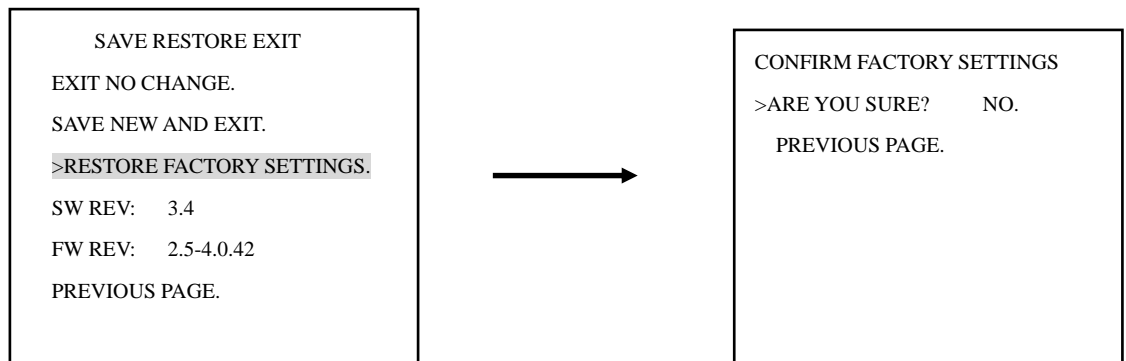

RESTORE FACTORY SETTING: you will be asked “Are you sure?” before you restore all settings to factory values. Select “YES” to confirm.

SW REV: indicating software version.

FW REV.: indicating firmware version.

PREVIOUS PAGE: Press SET button and you can return to the previous page.

EverFocus Electronics Corp.

Head Office:

12F, No.79 Sec. 1 Shin-Tai Wu Road,
Hsi-Chih, Taipei, Taiwan
TEL: +886-2-26982334
FAX: +886-2-26982380
www.everfocus.com.tw

USA L.A. Office:

1801 Highland Ave. Unit A
Duarte, CA 91010, U.S.A.
TEL: +1-626-844-8888
FAX: +1-626-844-8838
www.everfocus.com

USA N.Y. Office:

415 Oser Avenue Unit S
Hauppauge, NY 11788
TEL: 631-436-5070
FAX: 631-436-5027
www.everfocus.com

Europe Office:


Albert-Einstein-Strasse 1
D-46446 Emmerich, Germany
TEL: +49(0)-2822-9394-0
FAX: +49(0)-2822-9394-95
www.everfocus.de

China Office:

Room B-05D-1, KESHI PLAZA, Shangdi
Information Industry Base,
Haidian District, Beijing China
100085
TEL: +86-10-62973336/37/38/39
FAX: +86-10-62971423
www.everfocus.com.cn

Japan Office:

1809 WBG MARIBU East 18F,
2-6 Nakase.Mihama-ku.
Chiba city 261-7118, Japan
TEL: +81-43-212-8188
FAX: +81-43-297-0081
www.everfocus.co.jp

	<p>Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused.</p> <p>This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste.</p> <p>Please, dispose of this equipment at your local community waste collection/recycling centre.</p> <p>In the European Union there are separate collection systems for used electrical and electronic product.</p> <p>Please, help us to conserve the environment we live in!</p>	<p>Ihr EverFocus Produkt wurde entwickelt und hergestellt mit qualitativ hochwertigen Materialien und Komponenten, die recycelt und wieder verwendet werden können.</p> <p>Dieses Symbol bedeutet, dass elektrische und elektronische Geräte am Ende ihrer Nutzungsdauer vom Hausmüll getrennt entsorgt werden sollen.</p> <p>Bitte entsorgen Sie dieses Gerät bei Ihrer örtlichen kommunalen Sammelstelle oder im Recycling Centre.</p> <p>Helfen Sie uns bitte, die Umwelt zu erhalten, in der wir leben!</p>
---	--	---



EverFocus[®]
P/N: MEHDG01010_Ver.C

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>